






INSTRUCTIONS FOR USE


- A The car's seatbelt
- C Harness
- B Carabiner strap (can be left in the car)
- D Padded chestplate

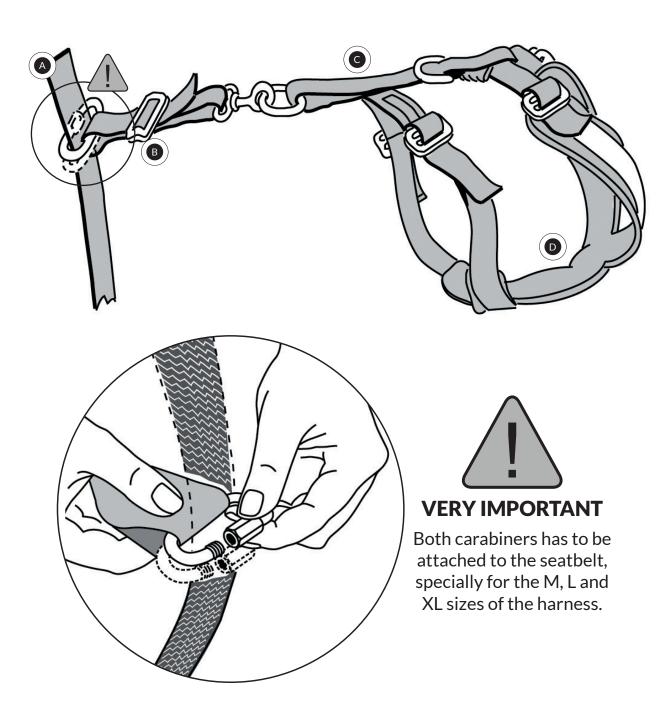

Use Description:


Create a larger opening in the harness to be able to pass the harness over the dog by releasing the harness's waist straps. Thread the harness over the dog and then tighten the straps evenly and not too hard. Secure the harness by re-threading the straps through the buckles. If the straps are too long, they can be cut off and "sealed" by burning the ends with a lighter. Attach the strap with the carbine hook to the seat belt.

When traveling, the carabiner's strap should be attached to the harness's lower lashing ring. At the end of the journey, the harness is detached from the strap with a carabiner. For regular leash, the upper lashing ring can be used.

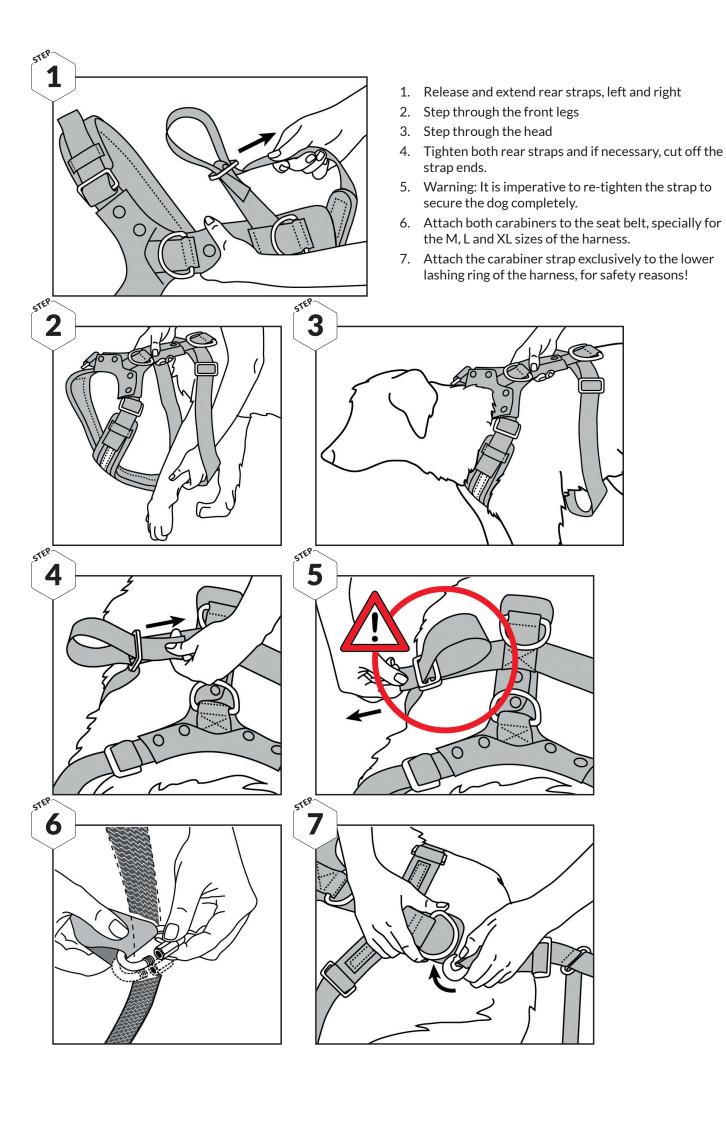



Make sure that the lower lashing ring is used to attach the harness to the seatbelt.

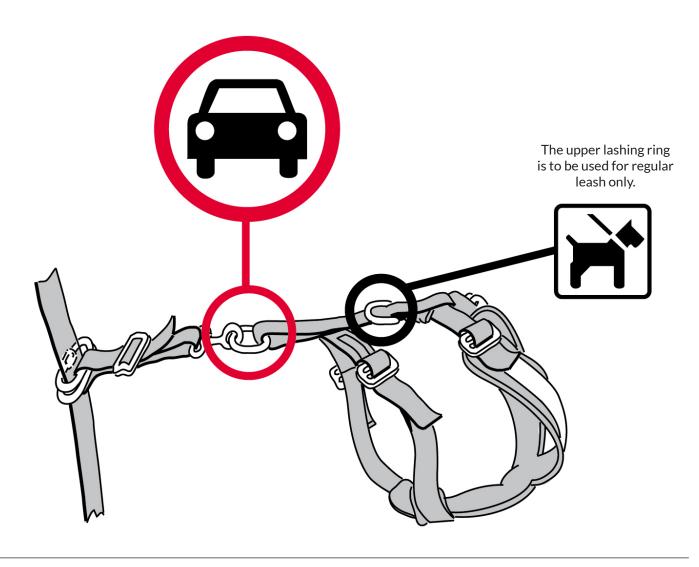

Care instructions:

When dirt and hair need to be removed from the harness, use a neutral soap.



Security Note:

The dog must always be transported in the back seat. Ideally behind a passenger-free front seat.

Check the harness regularly and replace the part that is broken or worn.